



DR40 Video Intercom

Equipped with a door reader, camera, and intercom, the DR40 makes it easy to monitor entry events, grant access, and seamlessly communicate with visitors.

Starting at \$899 (MSRP USD)



Technical Specifications

Dimensions: Mullion 50mm (1.97in) x 165mm (6.5in) x 35.1mm (1.38in) (height off wall, 38.3mm including cable)

Credential Compatibility: Rhombus Badge, ISO 14443A (CSN), Rhombus Key App

Weather Resistance: IP65

Operating Temperature: -40°C (-40°F) to 50°C (122°F)

Operating Humidity: 10%-90%

Frequency: 13.56 MHz

Controller Compatibility: DC20


Mounting: Wood / drywall screws, 1-Gang Wall Plate

Image Sensor: OS05A20

Resolution: 5MP sensor, 2688 x 1944 resolution

Field of View: 155.2° Diagonal FoV, 118.4° Horizontal FoV, 86.4° Vertical FoV

Rhombus 10-year Warranty included

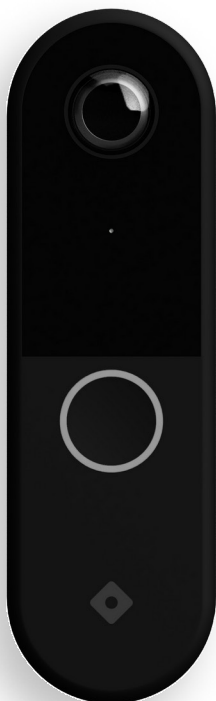

All-in-One Access Control with Real-Time Visibility



Access Events with Video

Capture automatic video clips of access events and see guests in real-time.



Two-Way Communication

Intercom functionality allows you to communicate with guests and grant access remotely.



Cloud-Managed

View video, control access, and manage permissions from a unified web console.



Touchless Access

Gain instant access with flexible methods - card, mobile app, or wave-to-unlock.